



Kimseed International Pty Ltd

ACN 108 508 336

42 Sarich Ct

Tel: 61-8-94464377

Western Australia

ABN 37 108 508 336

Osborne Park 6017

Fax: 61-8-94463444

www.kimseed.com.au

Email: kimseed@kimseed.com.au

Kimseed Shearer Multi Seed Drill



The KIMSEED Shearer Multi Seed drill is recommended for use in the improvement of existing pastures where some or all of that existing pasture is intended to be retained.

The coulters cut a path ahead of each sowing tine, which minimises disturbance of existing pasture. The fluted distributors cater for a wide range of sowing applications, from small pasture seeds such as clover and lucerne, up to large legumes.

FEATURES:

- 3 Row Frame
- Large capacity grain & fertilizer hopper
- 580 spring adjustable tine assembly
- Wide range 31 speed gear box
- Remote greasing, for G/F shaft bearings
- Extra large sight glass
- Fluted distribution in grain & fertiliser compartment
- Tyres 13 row – 185 x 14 x 4 ply
- Optional trailing hitch kit
- Gas struts on lid
- 280mm Coulters for excellent trash control

Australian Native
Seed Specialists

Seed & Revegetation
Equipment

Engineering Design
& Fabrication

Forestry
Management

International Environmental
Consultants


Celebrating 35 years of sustainable land management



Kimseed Shearer Multi Seed Drill

GRAIN & FERTILIZER BOXES

- Both boxes provide extra large capacity
- Distributors allow either seed or fertilizer to be distributed through both compartments

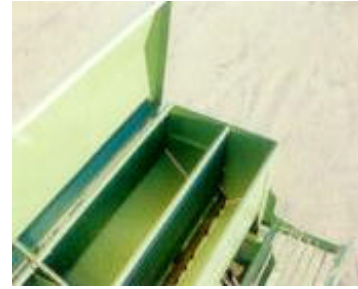

ADJUSTABLE TINE ASSEMBLY

- Edge-on tine assembly, fitted as standard,
- Easy pressure adjustment for varying soil conditions.
- Adjustable to 75kg (165lb) break-out pressure for increased digging ability.
- Ample underframe clearance for good trash handling



GEARBOXES

- Feature a 31 speed fully enclosed oil bath gearbox
- Gives simple calibration
- Wide range of sowing rates for seed & fertilizer

DISTRIBUTORS

Three row fluted rollers with restrictors

- Peg Tooth – Fluted & Broad Bean Rollers
- Blank off cover & roller insert



SPECIFICATIONS

Sowing Width	2.3m (7'8")
Sowing tine spacing	180mm (7")
Sowing rows	13
Overall Width	2.98m (9'10")
Disc Diameter	280mm (11")
Disc jump capacity	160mm (6 1/4")
Hopper Capacity	
- Total Litres	624
- Rear Wheat	210kgs
- Front Super	285kgs
Approx weight	
- Empty	970kgs
- Approx power 3PL	48 Kw (65 HP)
- Approx power trailing	30 Kw (40 HP)

13 Row

Australian Native
Seed Specialists

Seed & Revegetation
Equipment

Engineering Design
& Fabrication

Forestry
Management

International Environmental
Consultants

Celebrating 35 years of sustainable land management